
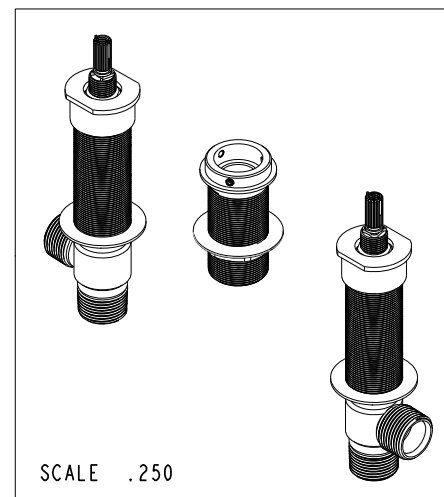


NOTES:

(N1) 1. FIT / FORM / FUNCTION SHALL FOLLOW PS-E.008.

BILL OF MATERIAL (CURRENT LEVEL)

ITEM	PT/ASSY	DESCRIPTION	TYPE	QTY.
1	1-230	R/T QUICK DISCONNECT	ASSEMBLY	1
2	1-552	R/T CART / VALVE ASSY - HOT	ASSEMBLY	1
3	1-553	R/T CARTR / VALVE ASSY - COLD	ASSEMBLY	1
4	10529	MOUNTING NUT	PART	2
5	12280	R/T-INVERT_FLANGE NUT	PART	2

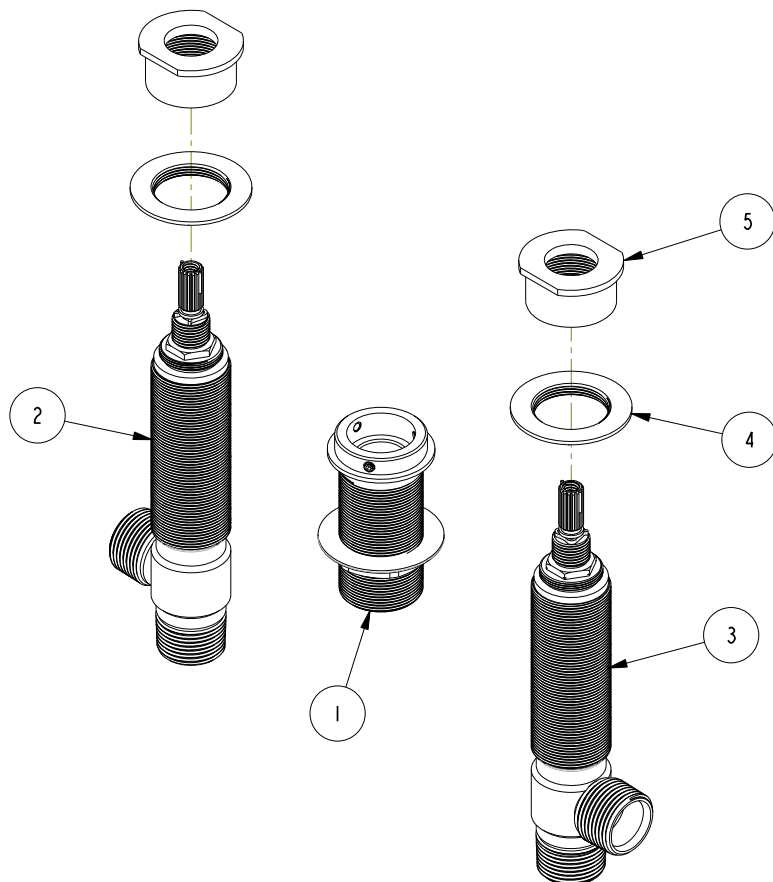

COPYRIGHT 2005 BRASSTECH, INC.
THESE DRAWINGS AND THE DESIGNS
DEPICTED HEREIN ARE THE PROPRIETARY
PROPERTY OF BRASSTECH. ANY USE
OR REPRODUCTION IS SUBJECT TO
THE EXPRESS APPROVAL OF BRASSTECH.
UNAUTHORIZED USE IS STRICTLY
PROHIBITED. ALL RIGHTS RESERVED.

								UNITS ARE: INCHES [MM] TOLERANCES ARE: FRACTIONS DECIMALS ANGLES ±1/16" .X ±.1 (2.5) ±1° .XX ±.06 (1.5)			BRASSTECH 2001 CARNEGIE AVE. INCORPORATED SANTA ANA, CA 92705 (949) 417-5207			
-	-	EN-3032d	07/13/16	AN	TESTING	-	-	-	-					
-	-				ASSEMBLY	-	-	-	-	(X.XXX) DENOTES CRITICAL DIMS. ALL THREADS ARE CRITICAL				
-	-				PLATING	-	-	3-3106 & 3-3126	-					
-	-				POLISHING	-	NEXT ASSY	USED ON	DRAWN	AN	07/13/16	DWG NO.	REV	
-	-				MACHINING	-	APPLICATION		CHECKED	AN	07/13/16	1-697	-	
ZONE	REV	DESCRIPTION	DATE	APPROVED	TOOLING FIXTURE #	REMOVE ALL BURRS AND SHARP EDGES			APPROVED	AN	07/13/16	SCALE .350	REF. -	SHEET OF