

Submittal Data

PROJECT:	UNIT TAG:	QUANTITY:
REPRESENTATIVE: _____	TYPE OF SERVICE:	DATE: _____
ENGINEER:	SUBMITTED BY:	DATE:
CONTRACTOR:	APPROVED BY:	DATE:
	ORDER NO.:	DATE:




UPSe 15-58 FR


UPSe is a high-efficiency circulator designed for heating systems. It offers high energy savings compared to traditional non-ECM pumps and three control modes that make it suitable for any heating application.

Note! Product picture may differ from actual product

Conditions of Service	Pump Data	Motor Data
Liquid: Water Temperature: 140 °F Specific Gravity: 0.985	Maximum operating pressure: 175.0 PSI Liquid temperature range: 35.6 .. 230 °F Maximum ambient temperature: 131 °F Pipe connection: GF 15/26 Product number: 92603107	Mains frequency: 60 Hz

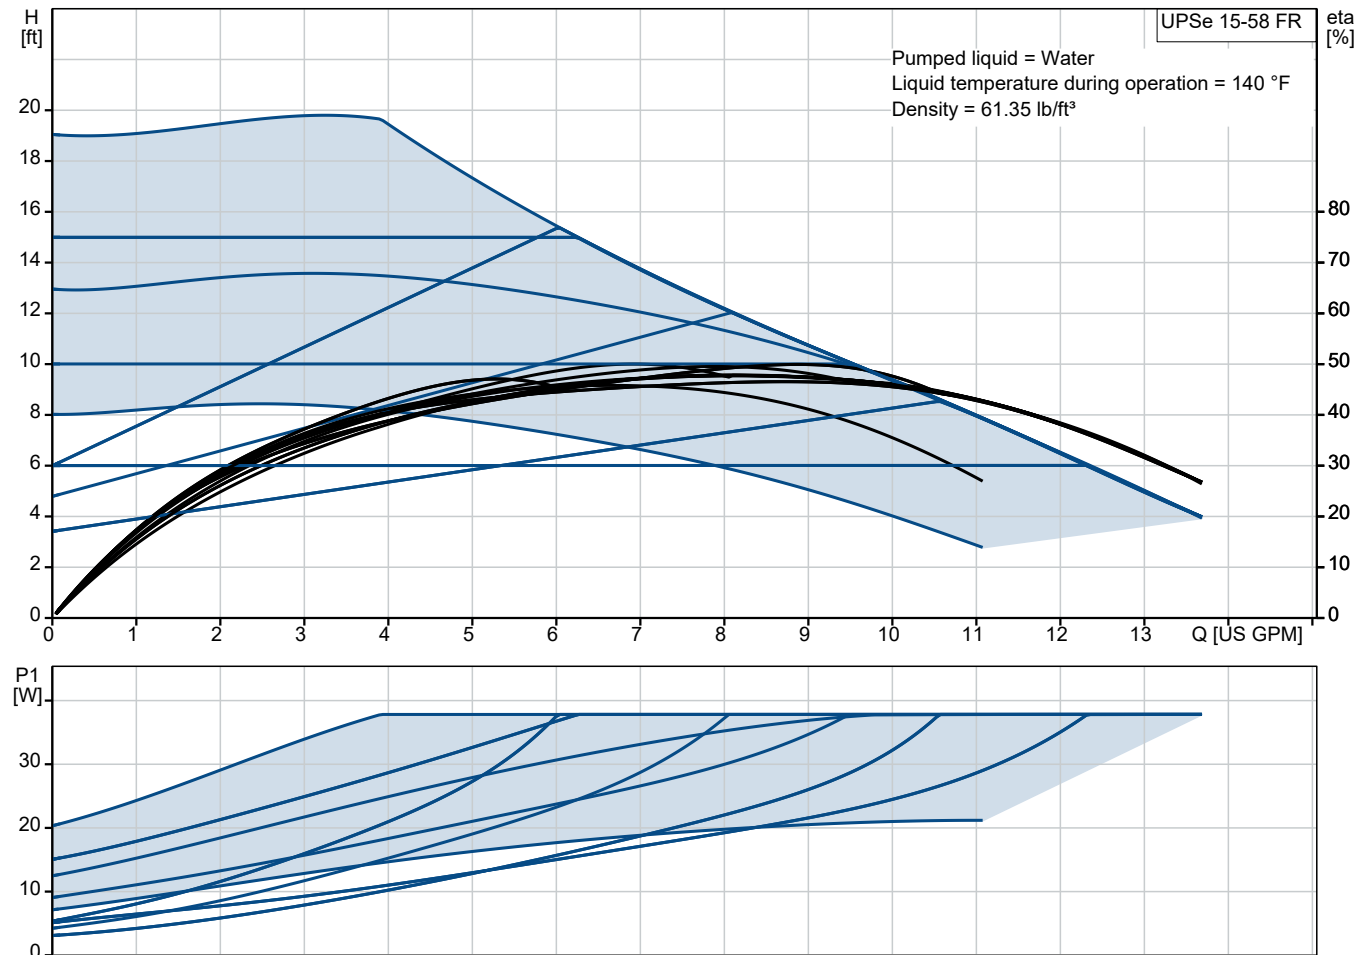

Submittal Data

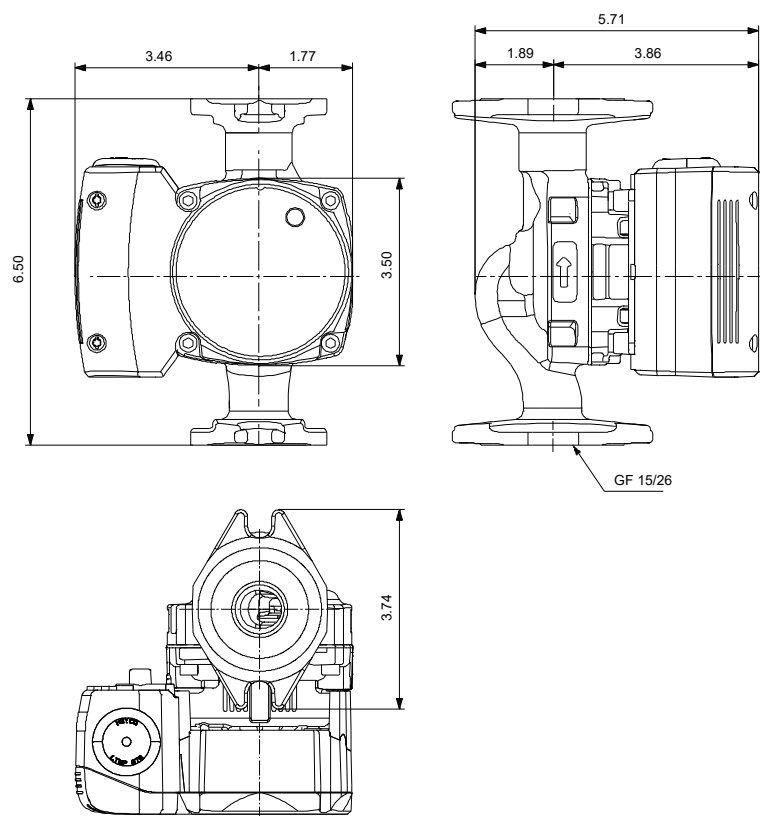

Materials:
Pump housing: Cast iron
ASTM A48-25A
Impeller: Composite