

# Lead Free Brass Ball Valve with PRESS Connections



## Lead Free Brass Ball Valve with PRESS Connections

The lead free Press ball valves are forged brass that combine reliable operation with maximum economy. Now with multiagency approvals, the PurePro® full port ball valve is ideal for various fluids, drinking water, fire protection, and general plumbing and HVAC applications. Valves are ANSI 3rd party Lead Free\* certified.

### Features:

- Drip Fit O-rings
- 2 piece
- No soldered-in end pieces
- Blow out proof stem, SLT coated LF brass
- Adjustable packing
- Dual O-rings (Viton+NBR)
- P.T.F.E. seats and double O-ring stem packing
- 100% electronically tested in the open and closed position at 80 psi


- Valve to be used in fully open or fully closed position
- Made in lead free dezincification resistant brass (LF-DZR)
- Conforms to MSS SP-110
- BAA - Buy American Act Compliant

### Performance rating:

- Valve design rating: Working pressure 200 CWP
- Temperature range: -4°F to 250°F

## Specifications

| Webb#  | Mfr. #        | Size   | Dimensions (in.) |      |      |      |      |      |      | Weight (lbs.) |
|--------|---------------|--------|------------------|------|------|------|------|------|------|---------------|
|        |               |        | A                | B    | C    | D    | E    | F    | G    |               |
| 765848 | PRO9322LF-12  | 1/2"   | 0.55             | 1.22 | 2.93 | 1.62 | 1.31 | 1.77 | 3.78 | 0.41          |
| 765850 | PRO9322LF-34  | 3/4"   | 0.75             | 1.46 | 3.37 | 1.85 | 1.52 | 2.22 | 4.84 | 0.71          |
| 765845 | PRO9322LF-1   | 1"     | 0.94             | 1.76 | 3.81 | 2.11 | 1.70 | 2.32 | 4.84 | 1.01          |
| 765847 | PRO9322LF-114 | 1-1/4" | 1.19             | 2.11 | 4.17 | 2.24 | 1.93 | 2.85 | 5.94 | 1.52          |
| 765846 | PRO9322LF-112 | 1-1/2" | 1.50             | 2.64 | 5.23 | 2.78 | 2.45 | 3.09 | 5.94 | 2.56          |
| 765849 | PRO9322LF-2   | 2"     | 1.95             | 3.39 | 6.27 | 3.29 | 2.98 | 3.7  | 6.3  | 4.39          |

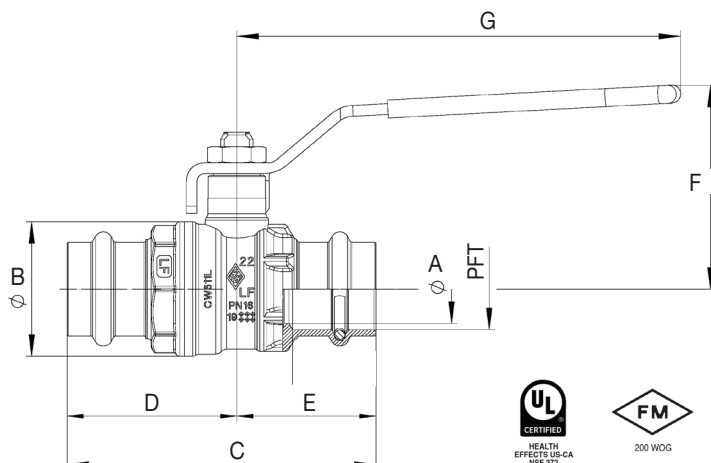

| Size   | Insertion Depth |
|--------|-----------------|
| 1/2"   | 0.71"           |
| 3/4"   | 0.91"           |
| 1"     | 0.91"           |
| 1-1/4" | 1.02"           |
| 1-1/2" | 1.42"           |
| 2"     | 1.57"           |



\* The wetted surfaces of this product shall contain no more than 0.25% lead by weighted average. Complies with CA AB1953, VT Act 193, MD HB372, LA HB471 and Federal Public Law 111380. ANSI 3rd party approved and listed.