

# Lead Free Full Port Brass Ball Valves



NPT shown here.

## Lead Free Full Port Brass Ball Valve



The lead free full port ball valves are forged brass that combine reliable operation with maximum economy. Now with multiagency approvals, the PurePro® full port ball valve is ideal for gas, fuels, fire protection, and general plumbing and HVAC applications including potable water. Valves are ANSI 3rd party Lead Free\* certified.

### Features

- Lead free materials and certification
- 2 Piece, full port design
- Blowout proof stem design
- Adjustable stem packing nut
- Multiple agency approvals
- Conforms to MSS SP-110
- BAA - Buy American Act Compliant

### Performance rating

- Valve design rating: 600 CWP - 1/4" to 2"
- Temperature range: -20°F to 300°F

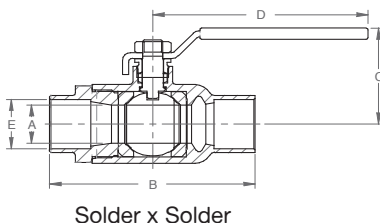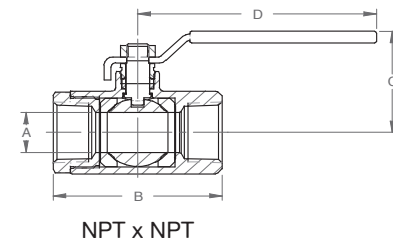

Specifications							
Full-Port Brass Ball Valve Mfr #	Size	Dimensions (in.)					Weight (lbs.)
		A	B	C	D	E	
NPT							
PROT101LF-14	1/4"	0.39	1.76	1.73	3.54	--	0.33
PROT102LF-38	3/8"	0.39	1.76	1.73	3.54	--	0.30
PROT103LF-12	1/2"	0.58	2.05	2.04	3.54	--	0.44
PROT104LF-34	3/4"	0.75	2.36	2.26	3.78	--	0.66
PROT105LF-1	1"	0.95	2.76	2.58	4.53	--	1.10
PROT106LF-114	1-1/4"	1.26	3.31	3.05	4.53	--	1.57
PROT107LF-112	1-1/2"	1.58	3.66	3.37	5.42	--	2.40
PROT108LF-2	2"	1.97	4.18	3.70	6.16	--	3.37
SOLDER							
PROC203LF-12	1/2"	0.58	2.05	1.84	3.54	0.63	0.38
PROC204LF-34	3/4"	0.75	2.75	2.14	3.78	0.88	0.64
PROC205LF-1	1"	0.95	3.31	2.45	4.53	1.13	0.99
PROC206LF-114	1-1/4"	1.26	3.82	3.04	4.35	1.38	1.40
PROC207LF-112	1-1/2"	1.58	4.43	3.17	5.39	1.63	2.17
PROC208LF-2	2"	1.97	5.38	3.49	6.31	2.13	2.97

\* The wetted surfaces of this product shall contain no more than 0.25% lead by weighted average. Complies with CA AB1953, VT Act 193, MD HB372, LA HB471 and Federal Public Law 111380. ANSI 3rd party approved and listed.