


# INSTALLATION



## Tools:

Philips Screwdriver



Silicone sealant




Adjustable wrench



Hex wrench



Pliers



Pipe tape



## Cleaning:


To maintain and protect the fine luster of all products, clean with a soft damp cloth only. **DO NOT USE** harsh chemicals or cleaners as they may harm the protective finish.

PRO1300 and PRO1300BN  
Available in Polished Chrome and Brushed Nickel.


## Warning and Notes:

Cover your drain to avoid losing parts. Check with local plumbing code requirements before installation. The fittings should be installed by a licensed plumber. To meet EPA requirements, replace original aerator after flushing lines. When installing flexible hose, there should be no torsion or deformation; **DO NOT** fold into V or L shape; **DO NOT** use if there are any cracks or deformations.


## Installation Steps: Single Handle Lavatory Faucet

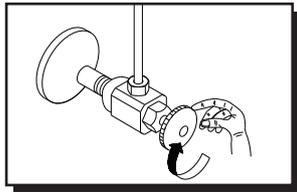


1. Turn off water supply. Remove existing faucet if necessary.

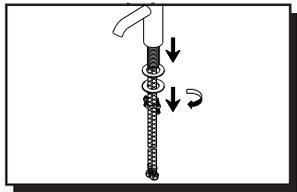


2. Remove preassembled mounting hardware from faucet.

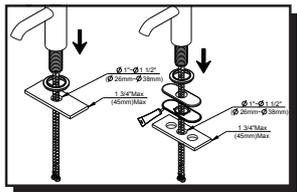


3. Without deck plate installation:  
Install faucet body through top of sink (not included).  
With deck plate installation:  
Place a bead of clear silicone sealant (not included) around the base of the putty plate. Place putty plate and deck plate on sink (not included). Insert faucet body through deck plate.

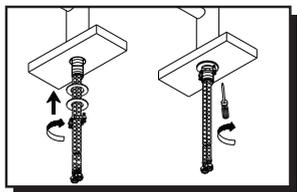


5. Attach mounting hardware assembly to the faucet.

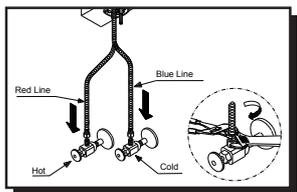


6. Connect water supply lines and tighten water supply nuts.

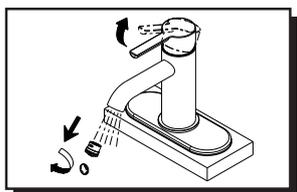


7. Remove Aerator from faucet. Turn on water to flush out air/debris when the water is clear and air is purged turn off water at handle, re-install aerator, turn back on for 15 seconds and inspect for leaks. (You need the Aerator on to create backpressure in the supply tube to check for leaks.)

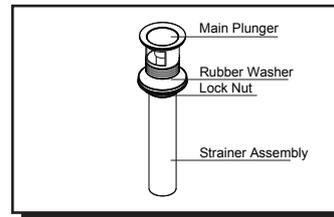


## Pop-up Drain Installation

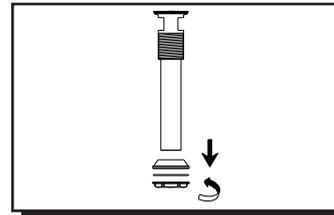


1. Remove strainer assembled parts from strainer body.

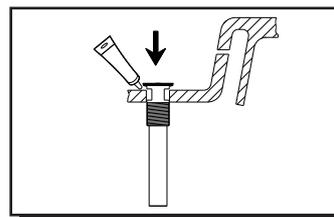

2. Place a ring of silicone sealant around drain opening of sink.

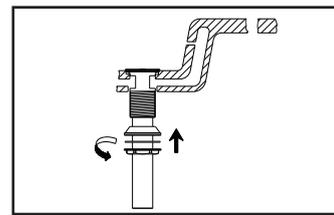


3. Insert strainer through drain hole. Put seal, washer and lock nut onto strainer assembly.

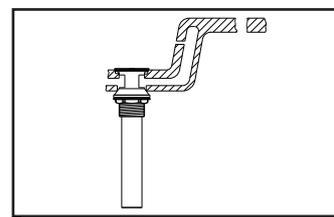

4. Check all drain connections for leaks.

# Exploded Drawing:

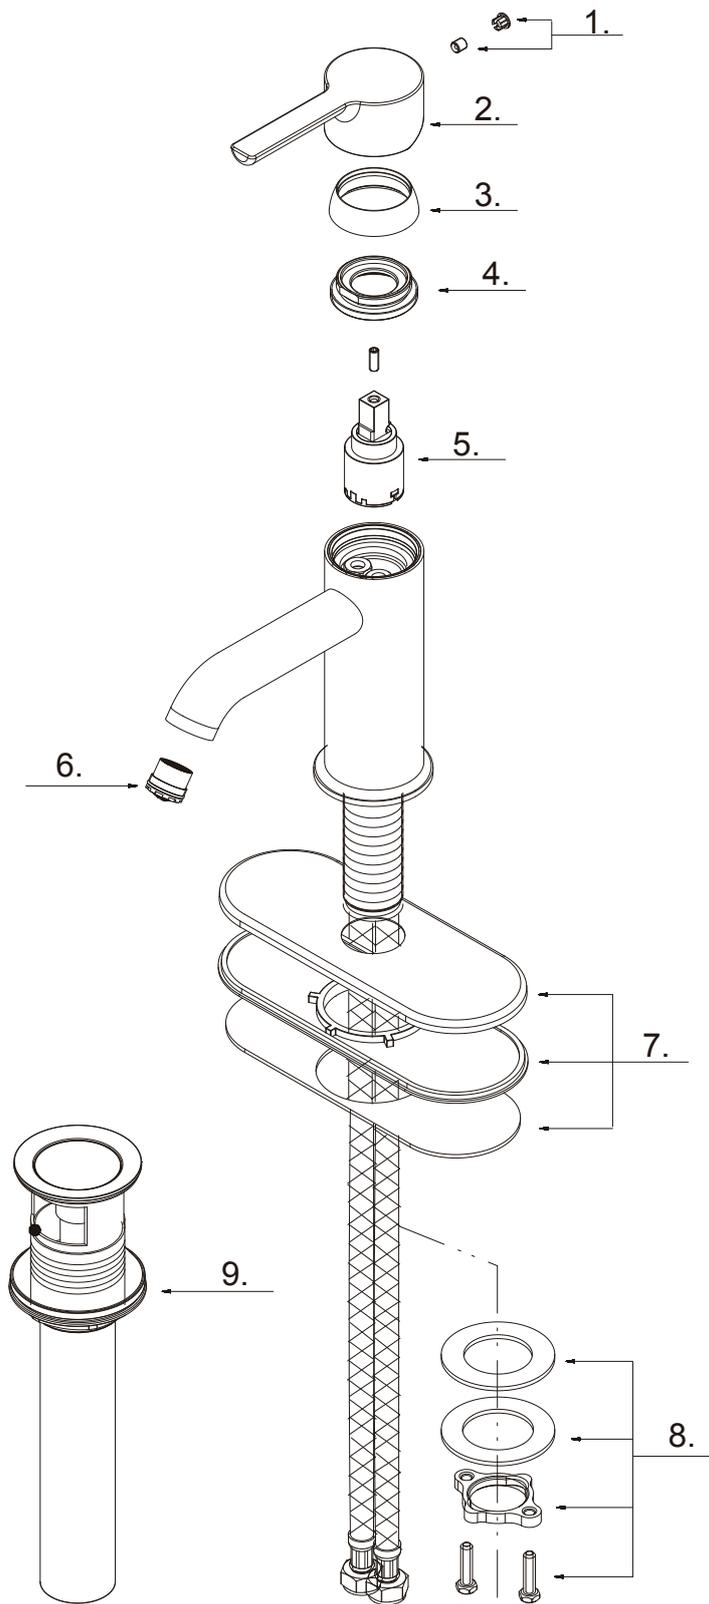

No.	Part Name	Part No.
1	Index Button	A66D806*
2	Metal Handle	A069984*
3	Trim Cap	A103121*
4	Adjusting Ring	A104041
5	Ceramic Disc Cartridge	A507169N
6	Aerator 1.2 gpm	A553058N
7	Deck Plate Assembly	A66F324*
8	Mounting Hardware	A663221
9	Metal Push Down Strainer Assembly	A505219*

\* If replacement is ever required, must indicate finish.

This product is engineered to meet the EPA WaterSense flow requirement.

The flow rate is governed by the aerator or flow controller.

If replacement is ever required, be sure to replace it with a WaterSense compliant aerator or flow controller to retain the water conserving flow rate of this product.