


INSTALLATION



PRO4720 and PRO4720BN
Available in Polished Chrome and Brushed Nickel.

Tools:

Philips Screwdriver



Silicone sealant



Adjustable wrench



Hex wrench



Pliers



Pipe tape



Cleaning:


To maintain and protect the fine luster of all products, clean with a soft damp cloth only. **DO NOT USE** harsh chemicals or cleaners as they may harm the protective finish.

Warning and Notes:


Cover your drain to avoid losing parts. Check with local plumbing code requirements before installation. The fittings should be installed by a licensed plumber. To meet EPA requirements, replace original aerator after flushing lines. When installing flexible hose, there should be no torsion or deformation; **DO NOT** fold into V or L shape; **DO NOT** use if there are any cracks or deformations.

Installation Steps:


Two Handle Widespread Lavatory Faucet




1. Turn off water supply. Remove existing faucet if necessary. Remove pre-assembled lock nut, metal spacer, and rubber spacer from shank of faucet body.




2. Place the spout in the center faucet hole of the sink (not included).




3. From underneath sink, replace rubber spacer and metal spacer, tighten with lock nut.




4. Insert hot handle and cold handle through the appropriate faucet holes. From underneath sink, replace rubber washer and metal washer onto shanks of hot handle and cold handle. Secure with guide washer.




5. Remove plastic cap from discharge tube. Attach faucet connecting hose to connector receiver on hot handle, faucet body and cold handle.




6. Attached water supply lines (not included) to the faucet water supply tubes.




7. Remove Aerator from faucet. Turn on water to flush out air/debris when the water is clear and air is purged turn off water at handles, re-install aerator, turn back on for 15 seconds and inspect for leaks. (You need the Aerator on to create backpressure in the supply tube to check for leaks.)




Pop-up Drain Installation




1. Remove strainer assembled parts from strainer body.



2. Place a ring of silicone sealant around drain opening of sink.




3. Insert strainer through drain hole. Put seal, washer and lock nut onto strainer assembly.



4. Check all drain connections for leaks.

Exploded Drawing:

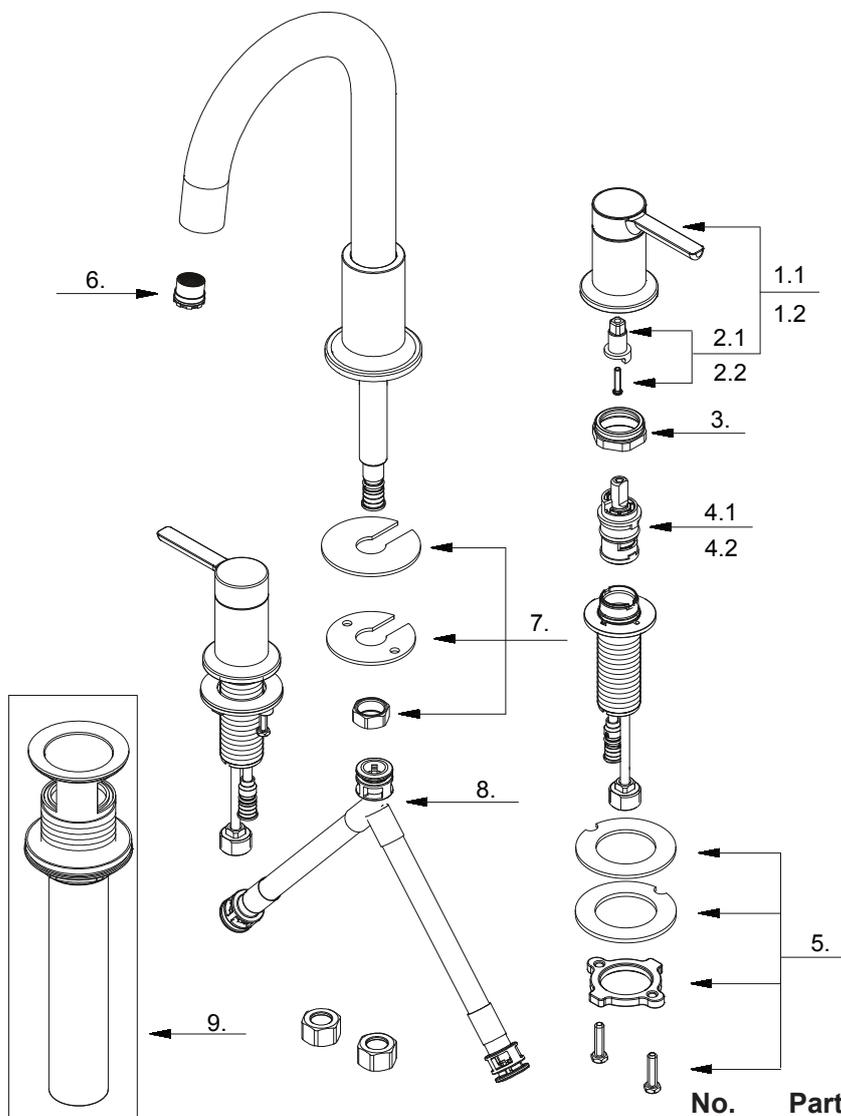

No.	Part Name	Part No.
1.1	Metal Handle Assembly - Cold	A602836C*
1.2	Metal Handle Assembly - Hot	A602836H*
2.1	Handle Adapter - Cold	A66G378C
2.2	Handle Adapter - Hot	A66G378H
3	Retainer Nut	A016022
4.1	Ceramic Disc Cartridge - Cold	A507104N
4.2	Ceramic Disc Cartridge - Hot	A507103N
5	Handle Mounting Hardware Assembly	A66D900ZN-H
6	Aerator Insert 1.2 gpm	A553058N
7	Mounting Spout Hardware	A603233
8	Connecting Hose	A135141N
9	Metal Push Down Strainer Assembly	A505219*

* If replacement is ever required, must indicate finish.

This product is engineered to meet the EPA WaterSense flow requirement.

The flow rate is governed by the aerator or flow controller.

If replacement is ever required, be sure to replace it with a WaterSense compliant aerator or flow controller to retain the water conserving flow rate of this product.