

# Cartridge Selector Guide

**PurePro**

Flow rate: 20 GPM (gallons per minute)\*\*

Bathrooms: 3-4 bath\*\*

See other side for 1 to 2.5 baths

## HOUSING:

DP BIG 4.5"X 10" CLEAR SUMP



### COMPLAINTS/ PROBLEMS


### CARTRIDGE FEATURES

### QUICKCODE #

Sediment/Rust,  
particulate,  
brown/black  
staining on  
fixtures.

#### SEDIMENT FILTER 5 Micron

Melt blown polypropylene



\*480988



### OPTIONAL ACCESSORIES

#### 1061923 LubriKit

Single-dose lubricant for housing o-ring to be used at the time of installation or maintenance.

Just apply the lubricant from its convenient, practical and safe doser and make the housing seal perfectly tight.



Chlorine  
taste/odor,  
musty smell.

#### CARBON BLOCK FILTERS


CTO Cartridge (Chlorine, Taste and Odor)



Also available in VOC CYST, VOC CYST/LEAD and chloramine.




\*1115075

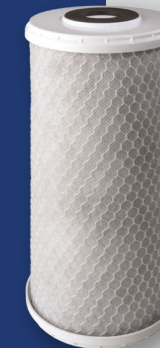

Sediment/Rust,  
particulate,  
brown/black  
staining on  
fixtures.

#### STRING WOUND SEDIMENT FILTERS 5 Micron (25 and 50 micron also available)


Polypropylene string wound cartridges, excellent for heavy and course sediment filtration.



\*481000



#### 1115069 O-Ring (blue) (every cartridge change)

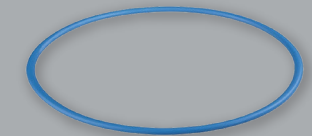

\*Filter is sized proportionally to housing

\*Larger housing sizes and inlets available (IE 4+ bath 1.5" main)

\*\*Estimated flow rates on standard city pressure through a new cartridge

This decision tree is based on standard city water complaints, this can be applied to private well applications but a water test would be suggested before proceeding.

Cartridge Selector Guide provided by the Walter F. Morris Company  
[www.morrismerchants.com](http://www.morrismerchants.com)

© The Walter F. Morris Company, January 2022



# Cartridge Selector Guide

**PurePro**®

Flow rate: 40 GPM (gallons per minute)\*\*

Bathrooms: 3-4 bath\*\*

See other side for 1 to 2.5 baths

## HOUSING:

DP BIG 4.5"X 20" CLEAR SUMP



1061946

### COMPLAINTS/ PROBLEMS

### CARTRIDGE FEATURES


### QUICKCODE #

\*480991

Sediment/Rust,  
particulate,  
brown/black  
staining on  
fixtures.

#### SEDIMENT FILTER 5 Micron

Melt blown polypropylene



### OPTIONAL ACCESSORIES

#### 1061923 LubriKit

Single-dose lubricant for housing o-ring to be used at the time of installation or maintenance.  
Just apply the lubricant from its convenient, practical and safe doser and make the housing seal perfectly tight.



Chlorine  
taste/odor,  
musty smell.


#### CARBON BLOCK FILTERS CTO Cartridge (Chlorine, Taste and Odor)



Also available in VOC CYST, VOC CYST/LEAD and chloramine.




\*1061920

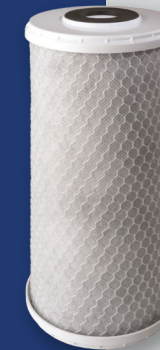

Sediment/Rust,  
particulate,  
brown/black  
staining on  
fixtures.

#### STRING WOUND SEDIMENT FILTERS 5 Micron (25 and 50 micron also available)

Polypropylene string wound cartridges, excellent for heavy and course sediment filtration.



\*1061858



#### 1115069 O-Ring (blue) (every cartridge change)



\*Filter is sized proportionately to housing

\*Larger housing sizes and inlets available (IE 4+ bath 1.5" main)

\*\*Estimated flow rates on standard city pressure through a new cartridge

This decision tree is based on standard city water complaints, this can be applied to private well applications but a water test would be suggested before proceeding.

Cartridge Selector Guide provided by the Walter F. Morris Company  
[www.morrismerchants.com](http://www.morrismerchants.com)

© The Walter F. Morris Company, January 2022



# Cartridge Selector Guide

**PurePro**

Flow rate: 12 GPM (gallons per minute)\*\*

Bathrooms: 1-2.5 bath\*\*

See other side for 3 to 4 baths

## HOUSING:

DP 2.5"X 10" CLEAR SUMP



1061929

\*Filter is sized proportionally to housing

### COMPLAINTS/ PROBLEMS

### CARTRIDGE FEATURES


### QUICKCODE #

\*480982

Sediment/Rust, particulate, brown/black staining on fixtures.

#### SEDIMENT FILTER 5 Micron

Melt blown polypropylene



Coarse sediments  
Fine sediments



### OPTIONAL ACCESSORIES

#### 1061923 LubriKit

Single-dose lubricant for housing o-ring to be used at the time of installation or maintenance.

Just apply the lubricant from its convenient, practical and safe doser and make the housing seal perfectly tight.



Chlorine taste/odor, musty smell.

#### CARBON BLOCK FILTERS

CTO Cartridge (Chlorine, Taste and Odor)



Fine sediments  
Chlorine  
Taste & Odor

Also available in VOC CYST, VOC CYST/LEAD and chloramine.



Volatile organic compounds (VOC)  
Colorants  
Pesticides  
Lead  
Pesticides


\*1115104



Sediment/Rust, particulate, brown/black staining on fixtures.

#### STRING WOUND SEDIMENT FILTERS 5 Micron (25 and 50 micron also available)

Polypropylene string wound cartridges, excellent for heavy and course sediment filtration.



Coarse sediments  
Fine sediments

\*480994



#### 1115094 O-Ring (black) (every cartridge change)



\*Larger housing sizes (and DUO) and inlets available upon request

\*\*Estimated flow rates on standard city pressure through a new cartridge

This decision tree is based on standard city water complaints, this can be applied to private well applications but a water test would be suggested before proceeding.

Cartridge Selector Guide provided by the Walter F. Morris Company  
[www.morrismerchants.com](http://www.morrismerchants.com)

© The Walter F. Morris Company, January 2022



# Cartridge Selector Guide

**PurePro**

Flow rate: 16 GPM (gallons per minute)\*\*

Bathrooms: 1-2.5 bath\*\*

See other side for 3 to 4 baths

## HOUSING:

DP 2.5"X 20" CLEAR SUMP



1061870

\*Filter is sized proportionally to housing

### COMPLAINTS/ PROBLEMS

### CARTRIDGE FEATURES


### QUICKCODE #

\*480985

Sediment/Rust, particulate, brown/black staining on fixtures.

#### SEDIMENT FILTER 5 Micron

Melt blown polypropylene



Chlorine taste/odor, musty smell.

#### CARBON BLOCK FILTERS

CTO Cartridge (Chlorine, Taste and Odor)



Also available in VOC CYST, VOC CYST/LEAD and chloramine.




\*1061855



Sediment/Rust, particulate, brown/black staining on fixtures.

#### STRING WOUND SEDIMENT FILTERS 5 Micron (25 and 50 micron also available)

Polypropylene string wound cartridges, excellent for heavy and course sediment filtration.



\*480997



### OPTIONAL ACCESSORIES

#### 1061923 LubriKit

Single-dose lubricant for housing o-ring to be used at the time of installation or maintenance.

Just apply the lubricant from its convenient, practical and safe doser and make the housing seal perfectly tight.



#### 1115094 O-Ring (black) (every cartridge change)



\*Larger housing sizes (and DUO) and inlets available upon request

\*\*Estimated flow rates on standard city pressure through a new cartridge

This decision tree is based on standard city water complaints, this can be applied to private well applications but a water test would be suggested before proceeding.

Cartridge Selector Guide provided by the Walter F. Morris Company  
[www.morrismerchants.com](http://www.morrismerchants.com)

© The Walter F. Morris Company, January 2022

