

# Zinc Offset Nipples & 3-Piece Rigid Conduit Couplings

## For Rigid Conduit

### Type RN

3/4" Offset

#### Use:

To provide an offset connection between two cabinets or enclosures.

#### Material/Finish:

Zinc Die Cast

#### Third Party Certification:



UL Listed: E32539



CSA Certified: 014489


#### Applicable Third Party Standards:

UL Standard: 514B


CSA Standard: C22.2 No. 18

NEMA: FB-1

Trade Size (inches)	Catalog Number	Dimensions in Inches	
		A	B
1/2	RN-50	2.45	0.94
3/4	RN-75	2.60	1.15
1	RN-100	2.76	1.40
1 1/4	RN-125	2.90	1.84
1 1/2	RN-150	3.05	2.06
2	RN-200	3.23	2.66

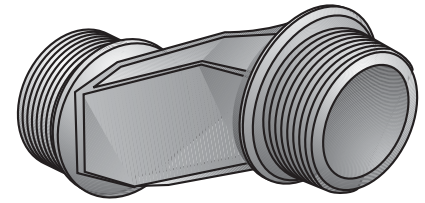

Type RN-50

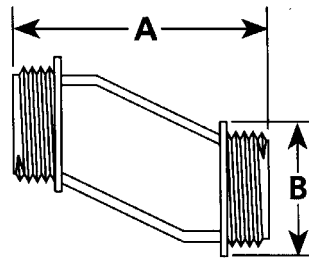

### Type TPC

#### Use:

Provides threaded coupling between lengths of conduit or conduit and conduit elbows, where neither can be rotated.

#### Material/Finish:

Malleable Iron/Zinc Plated

#### Third Party Certification:



UL Listed: E-163167



CSA Certified


#### Applicable Third Party Standards:

UL Standard: 514B

CSA Standard: C22.2 No. 18

NEMA: FB-1

Trade Size (inches)	Catalog Number	Dimensions in Inches		
		A	B	C
1/2	TPC-50	1.36	1.30	1.20
3/4	TPC-75	1.63	1.57	1.30
1	TPC-100	1.70	2.13	1.88
1 1/4	TPC-125	2.12	2.44	2.14
1 1/2	TPC-150	2.00	2.89	2.61
2	TPC-200	2.38	3.41	3.13
2 1/2	TPC-250	2.54	4.03	3.91
3	TPC-300	2.56	4.60	4.36
3 1/2	TPC-350	2.54	4.61	4.37
4	TPC-400	3.94	5.61	5.10

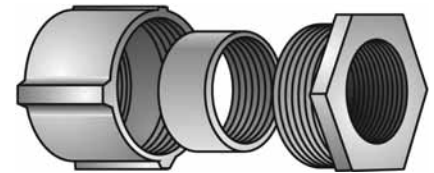

Type TPC-50

