RIB Functional Devices, Inc.

TRANSFORMER

TR100VA004

Transformer 96 VA, 480/277/240/120 to 24 Vac, Circuit Breaker, Foot and Dual Threaded Hub Mount

c UL us LISTED Class 2

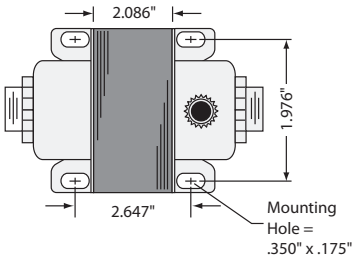

PRIMARY WIRES	SECONDARY WIRES
Gry - 480 Vac	Yel/Wht - 24 Vac
Brn - 277 Vac	
Org - 240 Vac	
Wht - 120 Vac	
Blk - Comm	Yel - Comm

Secondary Yel/Wht wire in phase with Primary Blk wire.

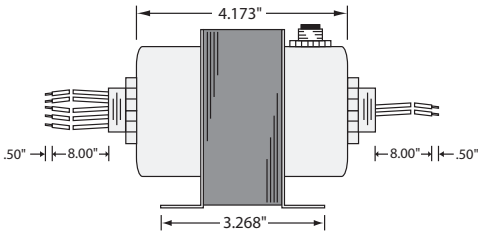



SPECIFICATIONS

VA Rating: 96
Frequency: 50/60 Hz
Mounting: Foot & Dual Threaded Hubs
Over Current Protection: Circuit Breaker
Dimensions: 4.173˝ x 2.523˝ x 3.041˝ (w/ .500˝ NPT Hubs)
Wire Length: 8˝ Typical w/ .5˝ Strip
Operating Temperature: -30 to 140° F
MTBF: 100,000 Hours @ 77° F
Construction: Split-Bobbin
Approvals: Class 2 UL5085-3 Listed, C-UL, CE, RoHS