


Copper Fittings

Reducing Tee

No. 625 Grv. × Grv. × Grv.

No. 626 Grv. × Grv. × Cup

No. 627 Grv. × Grv. × PL*

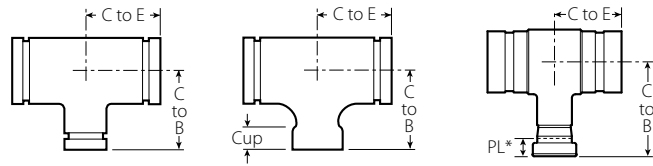

Size	No. 625 Grv. × Grv. × Grv.			No. 626 Grv. × Grv. × Cup				No. 627 Grv. × Grv. × PL*				
	Nominal Inches Actual mm	C to E Inches mm	C to B Inches mm	Approx. Wgt. Lbs. kg	C to E Inches mm	C to B Inches mm	Cup Inches mm	Approx. Wgt. Lbs. kg	C to E Inches mm	C to B Inches mm	PL* Inches mm	Approx. Wgt. Lbs. kg
2 54.0 × 2 54.0 × ¾ 22.5	1 28.6	—	—	—	2.20 56	1.98 50	0.75 19	0.75 0.3	2.20 56	2.93 75	0.52 13	0.84 0.4
	1 ¼ 34.9	—	—	—	2.33 59	2.20 56	0.91 23	0.81 0.4	2.33 59	3.27 83	0.56 14	0.96 0.4
	1 ½ 41.3	—	—	—	2.48 63	2.35 60	0.97 25	0.85 0.4	2.48 63	3.46 88	0.68 17	1.04 0.5
	2 54.0	3.28 83	3.38 86	1.58 0.7	—	—	—	—	—	—	—	—
2½ 66.7 × 2½ 66.7 × ¾ 22.5	1 28.6	—	—	—	2.26 57	2.23 57	0.75 19	1.00 0.5	2.26 57	3.25 83	0.52 13	1.26 0.6
	1 ¼ 34.9	—	—	—	2.40 61	2.40 61	0.91 23	1.17 0.5	2.4 61	3.58 91	0.56 14	1.32 0.6
	1 ½ 41.3	—	—	—	2.52 64	2.57 65	0.97 25	1.23 0.5	2.52 64	3.68 94	0.68 17	1.42 0.6
	2 54.0	3.28 83	3.38 86	1.58 0.7	—	—	—	—	—	—	—	—
3 79.4 × 3 79.4 × ¾ 22.5	1 28.6	—	—	—	2.41 61	2.56 65	0.75 19	1.40 0.6	2.41 61	3.58 91	0.52 13	1.54 0.7
	1 ¼ 34.9	—	—	—	2.54 65	2.79 71	0.91 23	1.45 0.7	2.54 65	3.97 101	0.56 14	1.60 0.7
	1 ½ 41.3	—	—	—	2.63 67	2.89 73	0.97 25	1.74 0.8	2.63 67	4.00 102	0.68 18	1.93 0.9
	2 54.0	3.00 76	3.38 86	2.14 c 1.0	—	—	—	—	—	—	—	—
4 104.8 × 4 104.8 × ¾ 22.5	1 22.5	—	—	—	3.04 77	2.97 75	0.75 19	2.75 1.2	3.04 77	3.99 101	0.52 13	2.95 1.3
	1 ¼ 34.9	—	—	—	3.10 79	3.22 82	0.91 23	2.86 1.3	3.10 79	4.40 112	0.56 14	3.01 1.4
	1 ½ 41.3	—	—	—	3.25 83	3.47 88	0.97 25	3.03 1.4	3.25 83	4.58 116	0.68 18	3.22 1.5
	2 54.0	3.35 85	3.65 93	1.09 28	3.16 85	3.35 85	1.23 31	1.4 0.6	3.35 85	4.83 123	0.75 19	3.43 1.6
	2 ½ 66.7	3.66 93	4.13 105	5.25 c 2.4	—	—	—	—	—	—	—	—
	3 79.4	3.94 100	4.06 103	5.75 c 2.6	—	—	—	—	—	—	—	—
	4 104.8	4.19 106	4.16 106	6.25 c 2.8	—	—	—	—	—	—	—	—

* PL refers to PermaLynx end and PL dimensions include the tube insertion depth.
c = Bronze casting; all others, drawn copper.


Copper Fittings

Reducing Tee

No. 625 Grv. × Grv. × Grv.

No. 626 Grv. × Grv. × Cup

No. 627 Grv. × Grv. × PL*

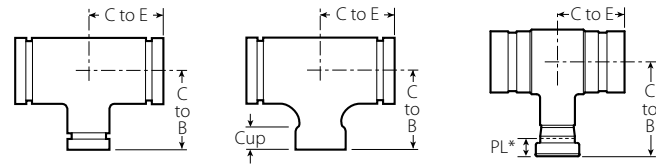

Size			No. 625 Grv. × Grv. × Grv.				No. 626 Grv. × Grv. × Cup				No. 627 Grv. × Grv. × PL*				
Nominal Inches	Inches	Actual mm	C to E Inches mm	C to B Inches mm	Approx. Wgt. Lbs. kg	C to E Inches mm	C to B Inches mm	Cup Inches mm	Approx. Wgt. Lbs. kg	C to E Inches mm	C to B Inches mm	PL* Inches mm	Approx. Wgt. Lbs. kg		
5	×	5	130.2	×	5	130.2	×	3	3.75	4.63	5.41	c	—		
								79.4	95	118	2.5	—	—	—	—
4	×	104.8	4.25	108	4.56	116	8.75	c	4.0	—	—	—	—		
														—	—
6	×	6	155.6	×	6	155.6	×	2½	3.63	5.13	6.66	c	—		
								66.7	92	130	3.0	—	—	—	—
								3	3.69	5.19	8.12	c	—	—	—
								79.4	94	132	3.7	—	—	—	—
4	×	104.8	4.19	106	5.13	130	9.75	c	4.4	—	—	—	—		
														—	—
5	×	130.2	4.69	119	5.19	132	11.25	c	5.1	—	—	—	—		
														—	—

* PL refers to PermaLynx end and PL dimensions include the tube insertion depth.

c = Bronze casting; all others, drawn copper.