

iQ251, Gen II Submittal Data

Date: Bid Date:

Project Name: Fuel Type: Natural Gas Propane

Project #: Factory Option: iNTouch-BMS

City | State | Zip:

Engineer:

Contractor:




KEY FEATURES

- Stainless (316L) Heat Exchanger
- Flexible-Floating Design, stress-relieving and thermal shock resistant
- Multi-Unit - Masterless cascading with common venting
- Gas Pressures - Operates on gas pressure range of 2.5"-14" w.c.
- ASME-HLW Compliant
- Designed and Built in the U.S.
- 3.5" Color Touch Screen - access to usage data, troubleshooting, and parts wear
- Wi-Fi Connectivity

PERFORMANCE

- Turndown Ratio of 8.3:1 per unit.
- Cascade up to 10 units with common venting for a total of over 2500MBH and a 83:1 total turndown ratio

	Temperature Rise (ΔT) °F						
	40	50	60	70	80	90	100
Flow (GPM)	12.0	9.6	8.0	6.9	6.0	5.4	4.8


iQ251, Gen II Specifications

PARAMETERS	iQ251, Gen II
Type	Indoor/Outdoor, Wall Hung, Fully Condensing, Tankless On-Demand Water Heater
Fuel	Preset for NG / LP convertible
Minimum / Maximum Input (BTU/hr)	30,000 / 251,000
Maximum Output (BTU/hr)	240,960
Thermal Efficiency	96%
Dimensions H X W X D (Inches)	26.2 X 17.7 X 15 (3.9 CU. FT)
Weight (LBS)	90 LBS
Water Inlet / Outlet Connection	3/4" NPT
Gas Inlet Connection	3/4" NPT
Minimum Flow Rate for Activation	0.6 GPM
Ignition	Electronic Spark Ignition
Venting Type	Direct Vent (2 pipe – intake & exhaust), Power Vent (1 pipe – exhaust only)
Venting Materials	Sch. 40 PVC, Sch. 80 CPVC, Polypropylene, Stainless Steel (AL29-4C)
Max 3" Vent Length – Single Pipe / Power Vent	130 ft, deduct 5 ft per 90° elbow
Max 3" Vent Length – Two Pipe / Direct Vent	65 ft, deduct 5 ft per 90° elbow
Common Venting	Yes
Installation Location Ambient Temperature	40°F – 130°F
Safety	Flame Rod, Thermal Fuse, Overheat Prevention Device, Fan Speed Monitor, Flue Temperature Monitor, Blocked Vent Detector, Water Shut-Off Valve, 2X10A Fuse, Dual Flame Sensing, Flue Damper
Water Pressure Min / Max (PSI)	30 / 160
NG/LP – Minimum Static Gas Pressure 1/2" (non-corrugated, black iron)	6" WC
NG/LP – Minimum Static Gas Pressure 3/4" (non-corrugated, black iron)	2.5" WC
NG/LP – Maximum Static Gas Pressure	14" WC
Gas Pressure for Adjustments	8" WC for NG, 11" for LP
Electrical	120V AC, 60 Hz
Power Consumption	500W (Max 4.2 Amps), 8W (Standby)
FEATURES & PERFORMANCE	iQ251, Gen II
Listing	ETL (Z21.10.3 / CSA 4.3), ASME HLW, SCAQMD (Low NO _x)
Cascading	Masterless, 10 units
Heat Exchanger	Expandable, Stainless 316L
Hot Water Capacity (35F Rise)	13.8
Hot Water Capacity (45F Rise)	10.7
Hot Water Capacity (77F Rise)	6.3
Commercial Mode Temp. Settings	100 – 190°F
Warranty (with recirculation, and unlimited thermal cycles)	Heat Exchanger Coil – 10 years, Parts – 2 years




Intellihot


iQ251, Gen II Dimensional Specifications

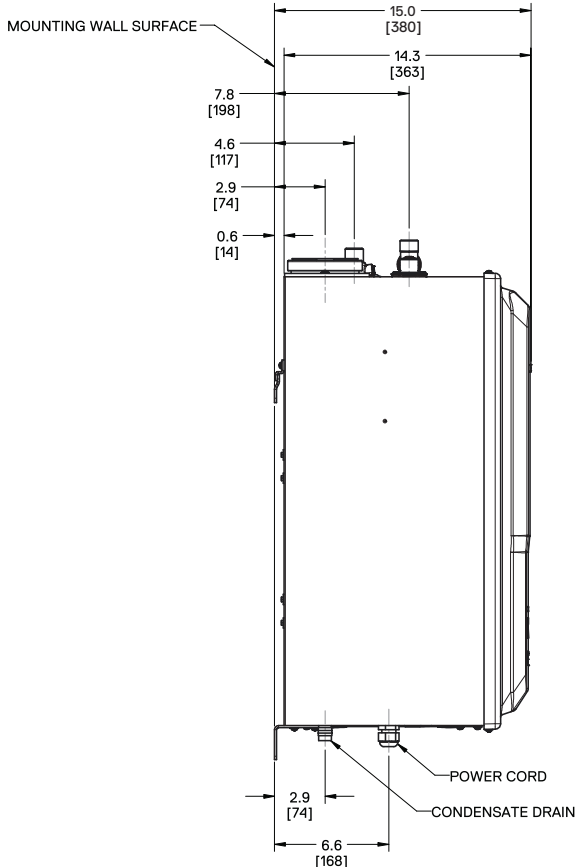


SIDE VIEW

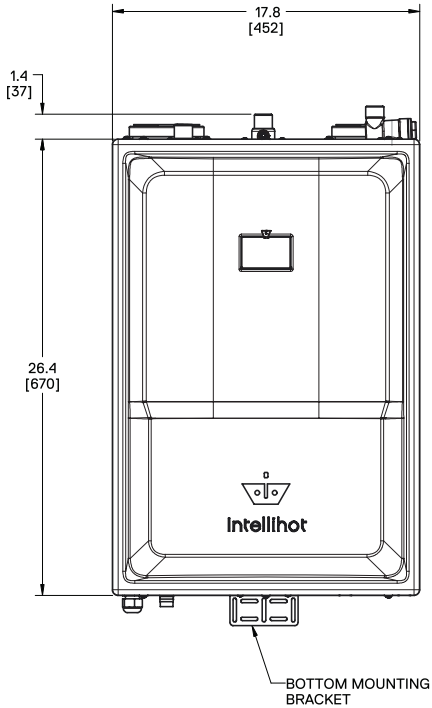

FRONT VIEW

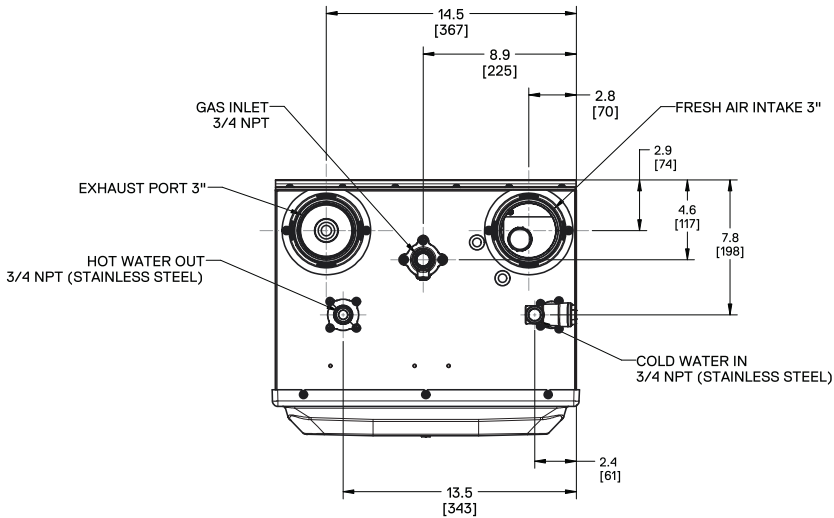


TOP VIEW

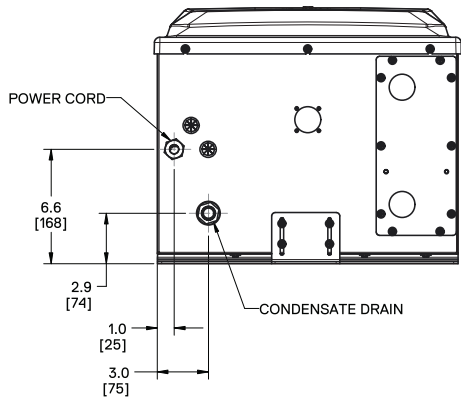


BOTTOM VIEW



iQ251, Gen II External Recirculation

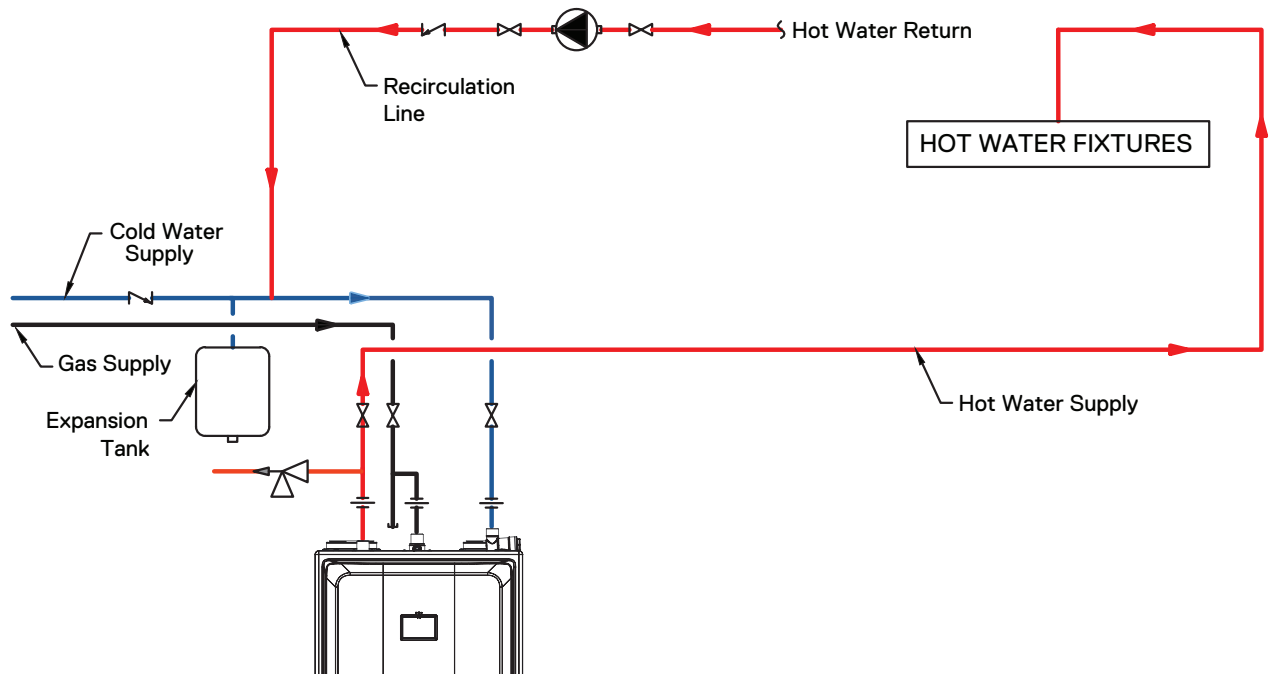

"RESTAURANT" OPTION WITH NO BUILDING RECIRCULATION

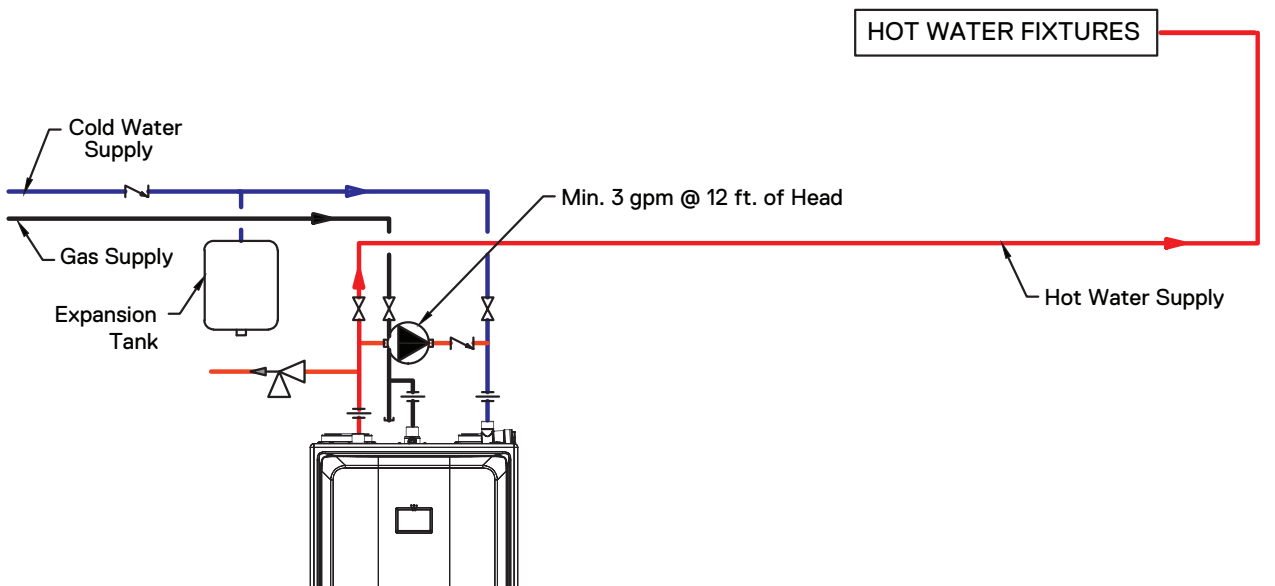

iQ251, Gen II Pressure Drop & Clearance Requirements

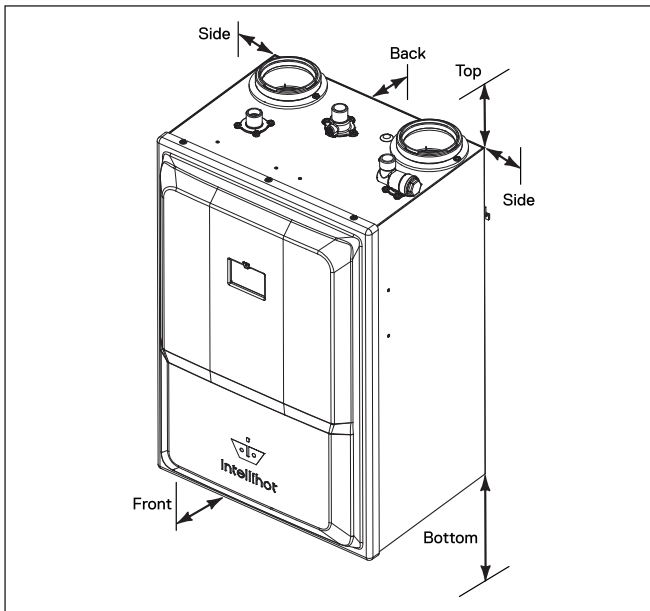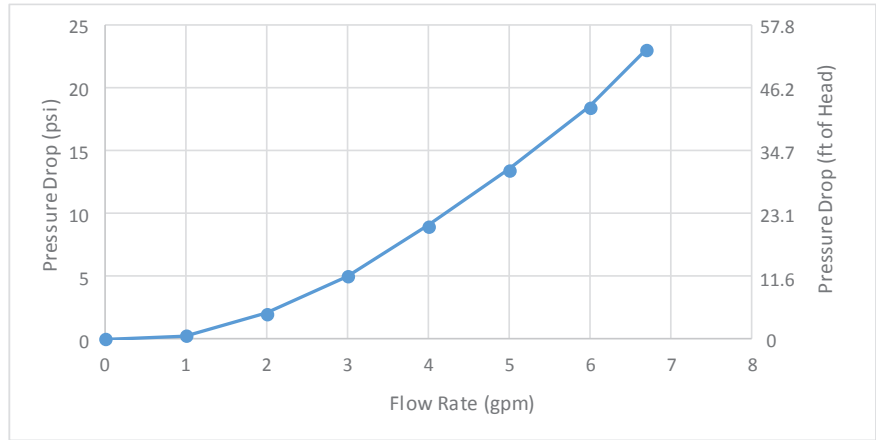

Location	Required		Recommended Service Clearance ¹
	From Combustibles	From Non-Combustibles	
Top	6" (152 mm)	2" (50.8 mm)	12" (305 mm)
Back	5/8" (15.8 mm)	5/8" (15.8 mm)	5/8" (15.8 mm)
Sides	1" (25.4 mm)	1/2" (12.7 mm)	5/8" (15.8 mm)
Front	2" (51 mm)	2" (50.8 mm)	30" (762 mm)
Bottom	12" (305 mm)	12" (305 mm)	12" (305 mm)

¹ Service clearances are suggested to allow for normal service.

² Mounting bracket automatically sets this dimension.

iQ251, Gen II Electrical Data


Electrical power required for the water heater is 120V AC, 60 Hz. The circuit breaker shall be a minimum of 15 amps. Only one water heater should be plugged into an outlet. Please ensure correct polarity of outlet before plugging in heater.

iQ251, Gen II Venting


Number of Units	Venting Type	Maximum Pipe Length in Feet			
		3" Diameter	4" Diameter	6" Diameter	8" Diameter
		iQ251, Gen II	iQ251, Gen II	iQ251, Gen II	iQ251, Gen II
1	1 pipe - PV	130	130	-	-
	2 pipe - DV	65	65	-	-
2	1 pipe - PV	-	130	-	-
	2 pipe - DV	-	65	-	-
3	1 pipe - PV	-	30	130	-
	2 pipe - DV	-	30	65	-
4	1 pipe - PV	-	-	130	-
	2 pipe - DV	-	-	65	-
5	1 pipe - PV	-	-	130	-
	2 pipe - DV	-	-	65	-
6	1 pipe - PV	-	-	130	-
	2 pipe - DV	-	-	65	-
7	1 pipe - PV	-	-	45	-
	2 pipe - DV	-	-	45	-
8	1 pipe - PV	-	-	30	130
	2 pipe - DV	-	-	30	65
9	1 pipe - PV	-	-	-	130
	2 pipe - DV	-	-	-	65
10	1 pipe - PV	-	-	-	130
	2 pipe - DV	-	-	-	65

PV = Power Vent
DV = Direct Vent

Note: Reduce the maximum equivalent length above by 5 feet per 90° elbow and by 2 feet per 45° elbow.
Do not exceed above limits.

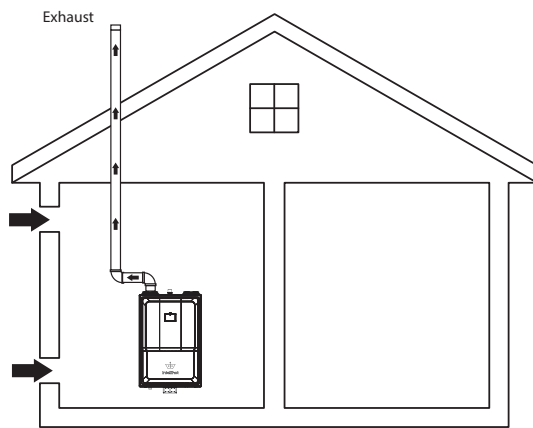

1-Pipe Direct Vent

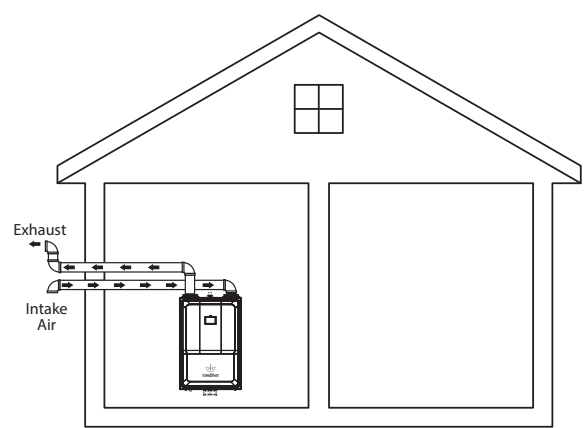

2-Pipe Direct Vent