

Lead Free Full Port Brass Ball Valves



NPT



Solder

Lead Free Full Port Brass Ball Valve

The lead free full port ball valves are forged brass that combine reliable operation with maximum economy. Now with multiagency approvals, the PurePro® full port ball valve is ideal for gas, fuels, fire protection, and general plumbing and HVAC applications including potable water. Valves are ANSI 3rd party Lead Free* certified.

Features


- Lead free materials and certification
- 2 Piece, full port design
- Blowout proof stem design
- Adjustable stem packing nut
- Made in Italy

Performance Rating


- Valve design rating: 600WOG-150WSP - 1/4" to 2"
- Temperature range: -20°F to 300°F
- Vacuum rating to -29HG

Approvals

- ANSI / NSF 61-372
- UL Listed & FM Approved
- ASME B16.33
- ASME B16.44
- MSS SP-110
- BAA - Buy American Act

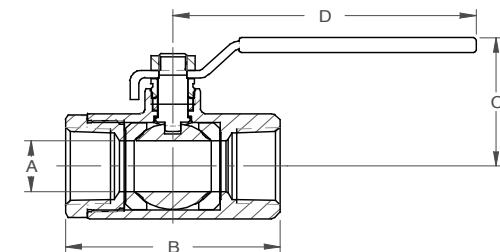

NPT x NPT

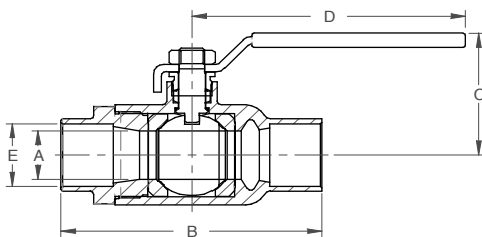

Solder x Solder

Specifications

Full-Port Brass Ball Valve Mfr #	Size	Dimensions (in.)					Weight (lbs.)
		A	B	C	D	E	
NPT							
PROT101LF-14	1/4"	0.39	1.76	1.73	3.54	--	0.33
PROT102LF-38	3/8"	0.39	1.76	1.73	3.54	--	0.30
PROT103LF-12	1/2"	0.58	2.05	2.04	3.54	--	0.44
PROT104LF-34	3/4"	0.75	2.36	2.26	3.78	--	0.66
PROT105LF-1	1"	0.95	2.76	2.58	4.53	--	1.10
PROT106LF-114	1-1/4"	1.26	3.31	3.05	4.53	--	1.57
PROT107LF-112	1-1/2"	1.58	3.66	3.37	5.42	--	2.40
PROT108LF-2	2"	1.97	4.18	3.70	6.16	--	3.37
SOLDER							
PROC203LF-12	1/2"	0.58	2.05	1.84	3.54	0.63	0.38
PROC204LF-34	3/4"	0.75	2.75	2.14	3.78	0.88	0.64
PROC205LF-1	1"	0.95	3.31	2.45	4.53	1.13	0.99
PROC206LF-114	1-1/4"	1.26	3.82	3.04	4.35	1.38	1.40
PROC207LF-112	1-1/2"	1.58	4.43	3.17	5.39	1.63	2.17
PROC208LF-2	2"	1.97	5.38	3.49	6.31	2.13	2.97

* The wetted surfaces of this product shall contain no more than 0.25% lead by weighted average. Complies with CA AB1953, VT Act 193, MD HB372, LA HB471 and Federal Public Law 111380. ANSI 3rd party approved and listed.