

# Braided Stainless Steel Supply Lines – Faucet Supply



## SUBMITTAL SHEET

<b>Job Name:</b>	
<b>Job Location:</b>	
<b>Engineer:</b>	
<b>Contractor:</b>	
<b>Tag:</b>	
<b>PO Number:</b>	
<b>Representative:</b>	
<b>Wholesale Distributor:</b>	

### Faucet Supply Specifications

Designed for the Professional Installer. PurePro faucet supplies are manufactured from corrosion resistant materials. Available with numerous connections and lengths. These flexible supply lines provide for easy installation.

#### Technical Specifications


Flow Rate: 6 to 7.6 gpm @80PSI  
 Working Pressure: 125 PSI  
 Working Temperature: 40° to 150°F  
 Made in Vietnam

#### Listing and Certifications

IAPMO Uniform Plumbing Code  
 IPC International Plumbing Code  
 NPCC National Plumbing Code of Canada State of  
 Massachusetts Plumbing Code ASME A112.18.6/CSA B125.6  
 NSF Standard 61, Section 9

#### Materials of Construction

Inner Tube: PVC  
 Braid: 304 Stainless Steel  
 Ferrule: 304 Stainless Steel  
 Compression Nut: Brass, Plated  
 Washer: EDPM Rubber

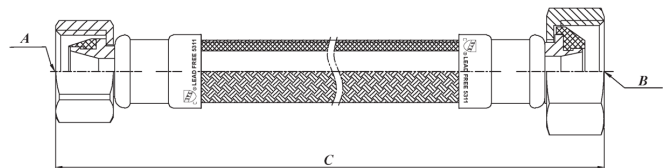

Webb#	Description	Dimension A (Inlet)	Dimension B (Outlet)	Dimension C (Length)
PROFC12	Faucet Supply Stainless Steel	3/8 COMP	1/2 FIP	12"
PROFC16	Faucet Supply Stainless Steel	3/8 COMP	1/2 FIP	16"
PROFC20	Faucet Supply Stainless Steel	3/8 COMP	1/2 FIP	20"
PROFC30	Faucet Supply Stainless Steel	3/8 COMP	1/2 FIP	30"
PROFC36	Faucet Supply Stainless Steel	3/8 COMP	1/2 FIP	36"
PROFC12F	Faucet Supply Stainless Steel	3/8 COMP	3/8 COMP	12"
PROFC16F	Faucet Supply Stainless Steel	3/8 COMP	3/8 COMP	16"
PROFC20F	Faucet Supply Stainless Steel	3/8 COMP	3/8 COMP	20"
PROFE12	Faucet Extension Supply Stainless Steel	3/8 COMP	3/8 DELTA	12"
PROFE20	Faucet Extension Supply Stainless Steel	3/8 COMP	3/8 DELTA	20"

# Braided Stainless Steel Supply Lines – Toilet Supply



## SUBMITTAL SHEET

<b>Job Name:</b>	
<b>Job Location:</b>	
<b>Engineer:</b>	
<b>Contractor:</b>	
<b>Tag:</b>	
<b>PO Number:</b>	
<b>Representative:</b>	
<b>Wholesale Distributor:</b>	

### Toilet Supply Specifications

Designed for the Professional Installer. PurePro toilet supplies are manufactured from corrosion resistant materials. Available with numerous connections and lengths. These flexible supply lines provide for easy installation.

#### Technical Specifications


Flow Rate: 6 to 7.6 gpm @80PSI  
 Working Pressure: 125 PSI  
 Working Temperature: 40° to 150°F  
 Made in Vietnam

#### Listing and Certifications

IAPMO Uniform Plumbing Code  
 IPC International Plumbing Code  
 NPCC National Plumbing Code of Canada State of  
 Massachusetts Plumbing Code ASME A112.18.6/CSA B125.6  
 NSF Standard 61, Section 9

#### Materials of Construction

Inner Tube: PVC  
 Braid: 304 Stainless Steel  
 Ferrule: 304 Stainless Steel  
 Compression Nut: Brass, Plated  
 Ballcock Nut: Glass Filled Polypropylene  
 Washer: EDPM Rubber

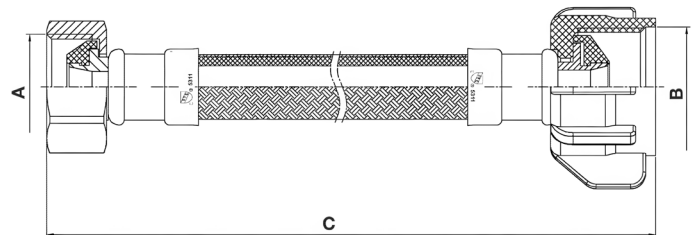

Webb#	Description		Dimension A (Inlet)	Dimension B (Outlet)	Dimension C (Length)
PROTC12	Toilet Supply	Stainless Steel	3/8 COMP	7/8 Ballcock	12"
PROTC16	Toilet Supply	Stainless Steel	3/8 COMP	7/8 Ballcock	16"
PROTC20	Toilet Supply	Stainless Steel	3/8 COMP	7/8 Ballcock	20"
PROTC12M	Toilet Supply	Stainless Steel	3/8 COMP	7/8 Metal Ballcock	12"
PROTC16M	Toilet Supply	Stainless Steel	3/8 COMP	7/8 Metal Ballcock	16"
PROTC20M	Toilet Supply	Stainless Steel	3/8 COMP	7/8 Metal Ballcock	20"

# Braided Stainless Steel Supply Lines – Washing Machine Supply



## SUBMITTAL SHEET

<b>Job Name:</b>	
<b>Job Location:</b>	
<b>Engineer:</b>	
<b>Contractor:</b>	
<b>Tag:</b>	
<b>PO Number:</b>	
<b>Representative:</b>	
<b>Wholesale Distributor:</b>	

### Washing Machine Supply Specifications

Designed for the Professional Installer. PurePro washing machine supplies are manufactured from corrosion resistant materials. Available in various lengths. These flexible washing machine hoses provide for easy installation.



#### Technical Specifications


Flow Rate: 6 to 7.6 gpm @80PSI  
 Working Pressure: 125 PSI  
 Working Temperature: 40° to 150°F  
 Made in Vietnam

#### Listing and Certifications

IAPMO Uniform Plumbing Code  
 IPC International Plumbing Code  
 NPCC National Plumbing Code of Canada State of  
 Massachusetts Plumbing Code ASME A112.18.6/CSA B125.6  
 NSF Standard 61, Section 9

#### Materials of Construction

Inner Tube: PVC  
 Braid: 304 Stainless Steel  
 Ferrule: 304 Stainless Steel  
 Compression Nut: Brass, Plated  
 Washer: EDPM Rubber

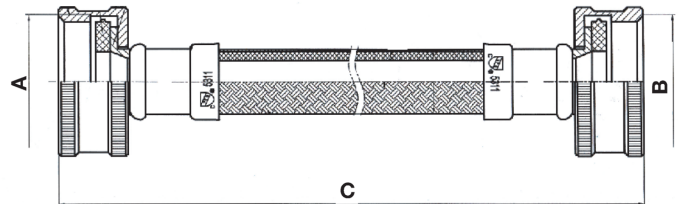

Webb#	Description	Dimension A (Inlet)	Dimension B (Outlet)	Dimension C (Length)
PROWMC48	Washing Machine Hose Stainless Steel	3/4 FGH	3/4 FGH	48"
PROWMC60	Washing Machine Hose Stainless Steel	3/4 FGH	3/4 FGH	60"
PROWMC72	Washing Machine Hose Stainless Steel	3/4 FGH	3/4 FGH	72"

# Braided Stainless Steel Supply Lines – Dishwasher Supply



## SUBMITTAL SHEET

<b>Job Name:</b>	
<b>Job Location:</b>	
<b>Engineer:</b>	
<b>Contractor:</b>	
<b>Tag:</b>	
<b>PO Number:</b>	
<b>Representative:</b>	
<b>Wholesale Distributor:</b>	

### Dishwasher Supply Specifications

Designed for the Professional Installer. PurePro dishwasher supplies are manufactured from corrosion resistant materials. Available in various lengths. These flexible dishwasher hoses provide for easy installation.

#### Technical Specifications


Flow Rate: 6 to 7.6 gpm @80PSI  
 Working Pressure: 125 PSI  
 Working Temperature: 40° to 150°F  
 Made in Vietnam

#### Listing and Certifications

IAPMO Uniform Plumbing Code  
 IPC International Plumbing Code  
 NPCC National Plumbing Code of Canada State of  
 Massachusetts Plumbing Code ASME A112.18.6/CSA B125.6  
 NSF Standard 61, Section 9

#### Materials of Construction

Inner Tube: PVC  
 Braid: 304 Stainless Steel  
 Ferrule: 304 Stainless Steel  
 Compression Nut: Brass, Plated  
 Washer: EDPM Rubber

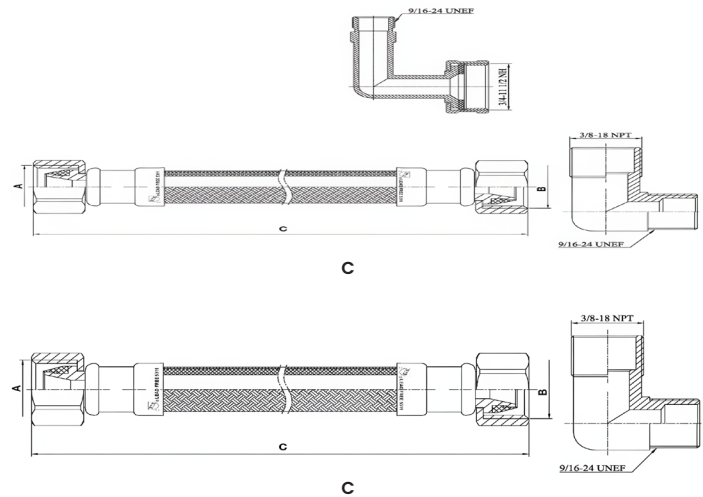

Webb#	Description		Dimension A (Inlet)	Dimension B (Outlet)	Dimension C (Length)
PRODWC48	Dishwasher Supply	Stainless Steel	3/8 COMP	3/8MIP	48"
PRODWC60	Dishwasher Supply	Stainless Steel	3/8 COMP	3/8 MIP	60"
PRODWC72	Dishwasher Supply	Stainless Steel	3/8 COMP	3/8MIP	72"
PRODWC60K	Dishwasher Supply	Stainless Steel	3/8 COMP	3/4 FGH	60"

# Braided Stainless Steel Supply Lines – Ice Maker Supply



## SUBMITTAL SHEET

<b>Job Name:</b>	
<b>Job Location:</b>	
<b>Engineer:</b>	
<b>Contractor:</b>	
<b>Tag:</b>	
<b>PO Number:</b>	
<b>Representative:</b>	
<b>Wholesale Distributor:</b>	

### Ice Maker Supply Specifications

Designed for the Professional Installer. PurePro ice maker supplies are manufactured from corrosion resistant materials. Available in various lengths. These flexible ice maker hoses provide for easy installation from water supply to refrigeration.

#### Technical Specifications


Flow Rate: 2 to 3.85 gpm @80PSI  
 Working Pressure: 125 PSI  
 Working Temperature: 40° to 150°F  
 Made in Vietnam

#### Listing and Certifications

IAPMO Uniform Plumbing Code  
 IPC International Plumbing Code  
 NPCC National Plumbing Code of Canada  
 State of Massachusetts Plumbing Code  
 ASME A112.18.6/CSA B125.6  
 NSF Standard 61, Section 9

#### Materials of Construction

Inner Tube: PVC  
 Braid: 304 Stainless Steel  
 Ferrule: 304 Stainless Steel  
 Compression Nut: Brass, Plated  
 Washer: EDPM Rubber

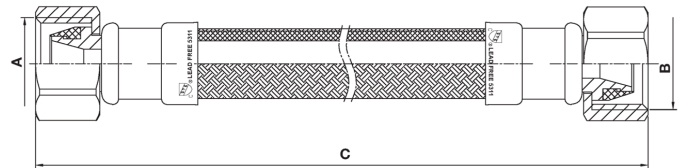

Webb#	Description		Dimension A (Inlet)	Dimension B (Outlet)	Dimension C (Length)
PROIMC60	Ice Maker Supply	Stainless Steel	1/4 COMP	1/4 COMP	60"
PROIMC96	Ice Maker Supply	Stainless Steel	1/4 COMP	1/4 COMP	96"
PROIMC120	Ice Maker Supply	Stainless Steel	1/4 COMP	1/4 COMP	120"